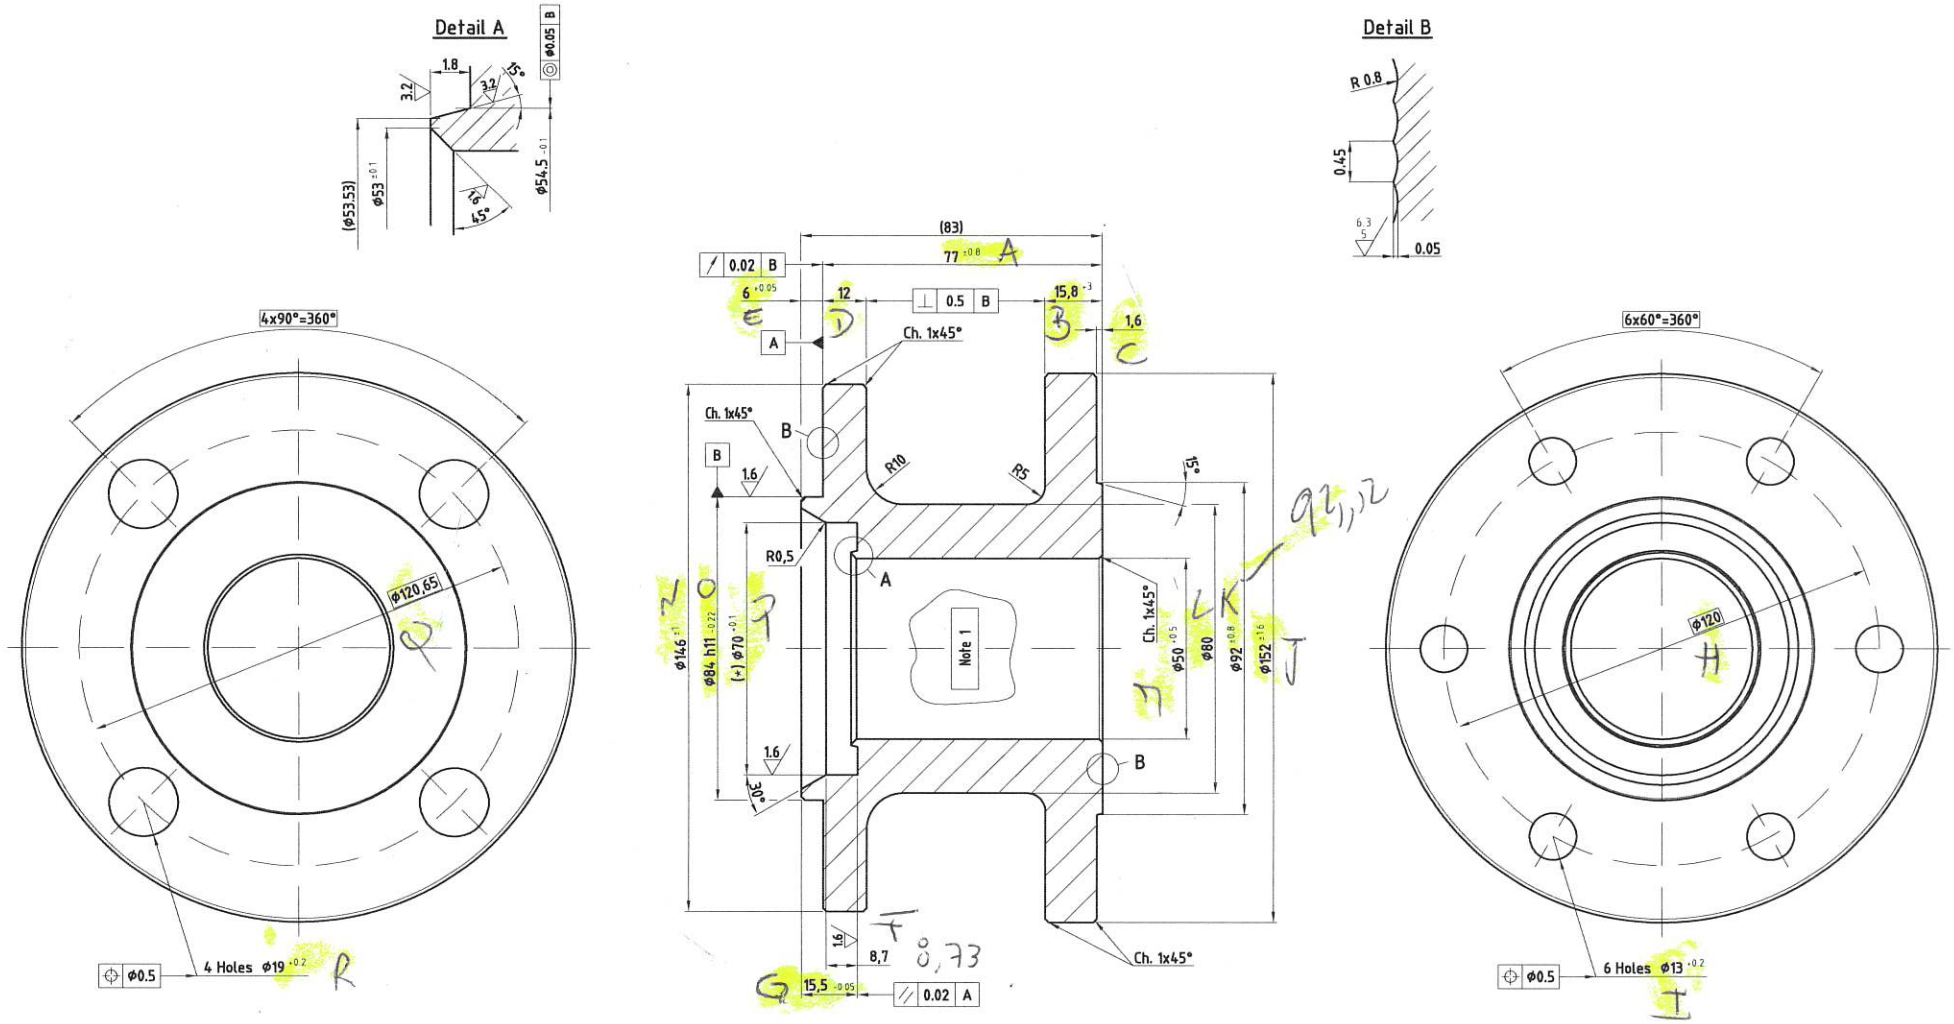

(*) Tolerance: ◎ ø0.05 B

Note 1: Zone for heat numbers and type of material

Sharp edges to be removed

				(Admis. dif. with sizes without tolerances) DIN 7168 Rough		(Surface)	Scale: 1:1	Weight: -- Kg	Pos.: 2
							Material: Your order Pattern nº.:		
				Drawn	Date 22-12-97	Name J. RUBIO	BODY CONNECTOR FIG.515 DN-2" Class-150		
				Chec.	22-12-97	C. Gallardo			
				Norm.					
0	First issue	12-97	J.R.	JC Valves JC Fábrica de válvulas, s.a. Tel. + (34) 938 54 66 66 // Fax + (34) 938 54 86 87			Drawing nº.: L515B50	0	Sheet
Rev.	Modification	Date	Nam.				Subs.:	Subs. by:	

This drawing is our property. It is strictly forbidden to use the drawing, to give it to third parties or to reproduce it totally or partially without our permission.

DIN 7168 Part 1 General tolerances in length & angular measures

Precision degree	Nominal measures										
f: Fine	0.5 to 3	3 to 6	6 to 30	30 to 120	120 to 400	400 to 1000	1000 to 2000	2000 to 4000	4000 to 8000	8000 to 12000	12000 to 16000
m: Medium	±0.15	±0.2	±0.5	±0.8	±1.2	±2	±3	±4	±5	±6	±7

DIN 7168 Part 2 General tolerances of shape

Precision degree	Nominal measures							
	0.5 to 3	3 to 6	6 to 30	30 to 120	120 to 400	400 to 1000	1000 to 2000	2000 to 4000
H: Alignement & straightness	±0.02	±0.05	±0.1	±0.2	±0.3	±0.4	±0.5	±1
K: Straightness	±0.02	±0.05	±0.1	±0.2	±0.3	±0.4	±0.5	±1

DIN 7168 Part 2 General tolerances of position

Precision degree	Symmetrical & coaxial
T: Tolerance	0.5